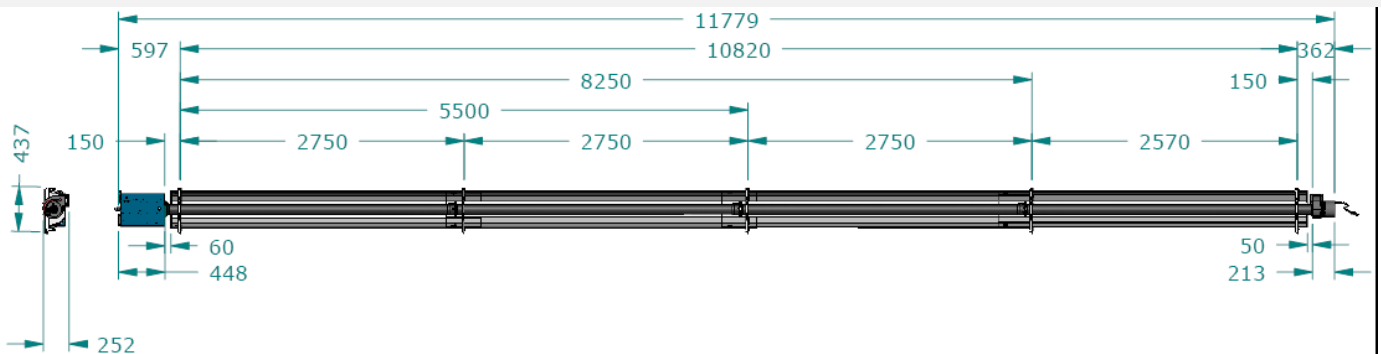



MODELOS

REFERENCIA	DESCRIPCIÓN	POTENCIA
PFTR06270320	MSM 12 L GN ALUMINIO – 12 metros en L	27 kW
PFTR06270330	MSM 12 L GLP ALUMINIO – 12 metros en L	27 kW
PFTR06180320	MSM 12 L GN INOX – 12 metros en L	27 kW
PFTR06180330	MSM 12 L GN INOX – 12 metros en L	27 kW
PFTR06270620	MSM 12 H GN ALUMINIO – 12 metros en L	37,8 kW
PFTR06270630	MSM 12 H GLP ALUMINIO – 12 metros en L	37,8 kW
PFTR06180620	MSM 12 H GN INOX – 12 metros en L	37,8 kW
PFTR06180630	MSM 12 H GN INOX – 12 metros en L	37,8 kW

DIMENSIONES:

CARACTERÍSTICAS TÉCNICAS

Modelo	Potencia Nominal (kW)	Potencia útil (kW)	Longitud tubos (m)	Tipo de gas	PCI gas (Kwh/m3)	Presión alimentación gas (mbar)	Consumo gas (m3/h)	(Kg/h)	inyector (mm)	Presión inyectores (mbar)
MSM 12 L	27	24	12	G20	9,45	20	2,54		4,2	9
MSM 12 L	27	24	12	G30	32,25	37		1,98	2,5	28
MSM 12 L	27	24	12	G31	24,45	37		1,9	2,5	35,7
MSM 12 H	37,8	34	12	G20	9,45	20	3,6		5	9
MSM 12 H	37,8	34	12	G30	32,25	37		2,77	2,9	28
MSM 12 H	37,8	34	12	G31	24,45	37		2,66	2,9	35,7

ALIMENTACIÓN ELÉCTRICA: 230 VAC-50HZ – 150 W